



## UNDERMOUNT UM5

- ★ LOW NOISE LEVEL
- ★ LOW FUEL CONSUMPTION
- ★ LOW WEIGHT
- ★ 1000H SERVICE INTERVAL
- ★ EXTRA ROAD CLEARANCE

The Genmark Undermount Generator is designed for fixed chassis and is positioned in the middle of the trailer.

This model has adjustable mounting beams, offering the flexibility to mount the unit in the best position under your chassis.

The Genmark Undermount Genset has the highest ground clearance on the market at up to 40 cm (16 inches).

An excellent option of the Undermount is the ability to mount the control panel externally on the side of the chassis, so the generator can be easily operated.



## ENGINE

YANMAR STAGE V

2.286 liters

70 dB

1.8 liters @ 380 V / 50 Hz

13.3 liters oil capacity

## ALTERNATOR

RFL 24 kW

94.% efficiency

## TANK

130 liters

110 liters optionnal

## CONTROLLER

MarkOne® Controller

5 inch TFT screen

Electric fuel meter

GPRS and data

Solid state relay

## SAFETY




Oil level & water temperature safety

Lateral Protection Certification

E4\*73 R01/01\*0257\*00

EMC Certification

E4\*10R05/01\*4237\*00

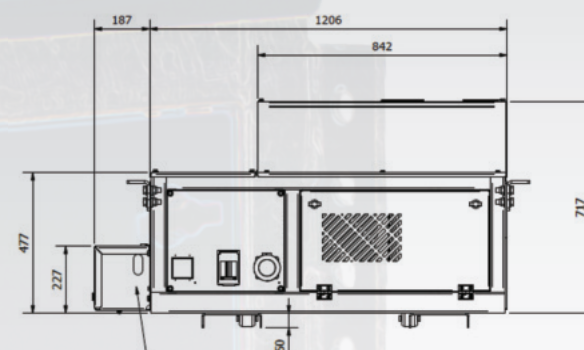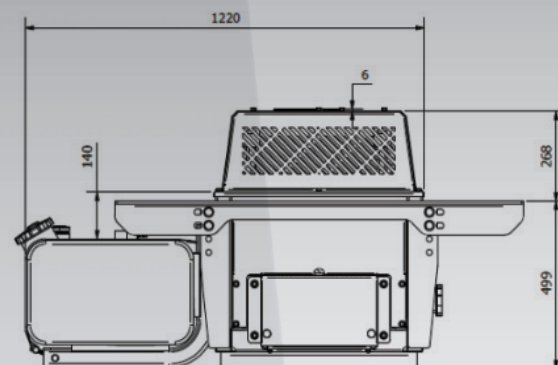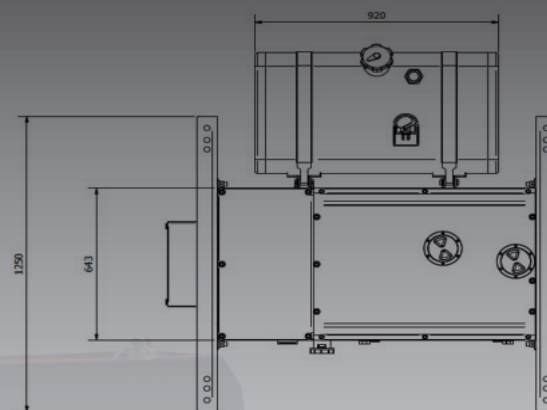

Battery box can be placed on trailer chassis instead of genset.